



# Refrigerated Isotherms Separate Cell Vivaro Platform-cabs

Insulated box **NEW FRIGOLINE** from 10 m<sup>3</sup> to 11m<sup>3</sup> on platform-cabs

ATP-compliant converted vehicle (certified by CEMAFROID) authorizing the transport of perishable foodstuffs.



## Advantages: 3 body types taylored to suit your business needs

- ❖ **NEW FRIGOLINE**: attractive, lightweight, and ergonomic, with « easy-handle » door locks.
- ❖ **NEW FRIGOLINE PRO**; super-sturdy, reinforced buffers, floor, and kickstrips, stainless-steel tripled OT frame.
- ❖ **NEW FRIGOLINE BEEF / PRO BEEF**: designed and optimized for the transport of hanging-meat.



A single design from 1 to 100m<sup>3</sup>,  
A sales & service network throughout Europe  
> UTAC-qualified operator, CEMAFROID manufacturer certification  
> Product certification to ATP and DIN standards  
> Factories compliant with ISO 9001 version 2008  
> Product specifications include the HACCP hygiene policy and NF food safety standards  
> Approved assembly and installation center for CARRIER®, KERSTNER®, and EDT®, partner of THERMOKING®



**Basic vehicle:**

**New Vivaro flatbed**

L2H1 – wheelbase 3498 mm

**Compatible** with original coupling hook (if installation before conversion).

**IF COOLING UNIT:**

*Indicative data – Consult us beforehand to check compatibility, delivery time and sizing of the unit..*

**Stop&Start** not recommended. Compatibility by activation of idle boost through converter plug (KDP).

**With** power take-off PFMOT, with converter plug, **without** robotized gearbox

**Compatible with air conditioning** (with adapted unit – consult us)

**Description of the conversion:**

• **NEW FRIGOLINE cell**, "High-Insulation" quality, made of antibacterial-polyester-polyurethane gel-coat composite panels at least 85 mm thick, fitted with aluminum inserts, designed to HACCP hygiene directives.

• **4 inner heights** (1.80 / 1.95 / 2.05 / 2.15m) and **5 types of rear door arrangements** (OB1 – OB2 – OT2 – OT3 – OR) available

• **Standard:**

1-panel OB1 rear door with recessed 1-motion « easy handle », aluminum molding, LED lightning inside, non-skid floor with wheel arches and 1 front right drainage channel, three-sided aluminum kickstrips including protective runners on wheel arches, partial rear foot-step, sidelights if overall length is longer than 6 meters.

**Refrigeration unit:**

**Above-zero unit**(class A) or **sub-zero unit** (class C), placed on front face

Pulley-engine technology, power based on use

**Options:** sector, heating, multi-temperature, temperature recorder, spoiler.

Dimensions (mm) / Versions	L2H1 Hi 1800	L2H1 Hi 1950	L2H1 Hi 2050	L2H1 Hi 2150
<b>Wheelbase</b>	3498			
<b>Outer length</b>	5682			
<b>Cell length</b>	2924 (OB) / 2900 (OT)* Special Version coupling: 2844 (OB) / 2850 (OT)			
<b>Usable length</b>	2754 (OB) / 2730 (OT)*			
<b>Max usable width</b>	1917			
<b>Overall width</b>	2093			
<b>Wheel arch width</b>	1204			
<b>Max usable height</b>	1800	1950	2050	2150
<b>Total outer height</b>	2506	2656	2756	2856
<b>Estimated usable volume in m<sup>3</sup></b>	9,5	10,3	10.8	11.3
<b>Mass of insulation</b>	490	510	540	580

\*Full opening (OT) optional

**Conversion options and packages:**

**Packages:**

• **"PRO"** with **OB1** or optionally **OB2**: Reinforced floor + HD aluminum kickstrips + high-tightness brackets at kickstrips corners.

• **"PRO"** with **OT** option: Reinforced floor + HD aluminum kickstrips + high-tightness brackets at front kickstrips corners + triple-thick VHYS steel/aluminum/stainless steel frame + threshold protection along entire length and height + 2 buffers on vertical risers + 2 buffers in which rear outline marker lights are embedded if the vehicle has them as an option.

• **"BEEF"**: with insulated steel inserts every 610mm, suitable for fastening hangers Hanging meat transport solution.

• **"PRO BEEF"** Combination of PRO and BEEF packages, reinforced hanging meat transport solution..

**Options:**

Two-panel swinging rear door (OB2) with integrated door-locks, or full rear door with 2 (OT2) or 3 (OT3) panels on reinforced bolted frame with external door-locks.

Side swinging door (900 x IH, position from 100 mm of the rear). Bulkhead for multi-temperature vehicle, adjustable and liftable shelves, rails, runners, Interinox fasteners, meat hangers (on BEEF and PRO BEEF) with fish accessories.



On OT2, Pro Package: Triple stainless steel vertical risers on frame



Interinox + rails + hangers option



On OT/Pro Package: reinforced stops



OT2 option, bolted rear frame




1-motion "easy" handle



OB1 opening

This document is for information purposes only. Images may depict optional features. As part of its continuous improvement policy, LAMBERET reserves the right to alter the characteristics of the conversions without prior notice. Photo credit: LAMBERET SAS – 02/20156

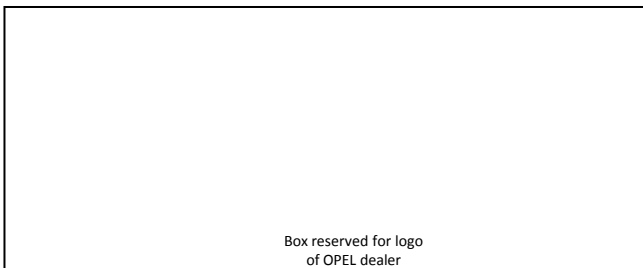

Box reserved for logo of OPEL dealer

LAMBERET SAS  
Pôle Commercial VU  
Tel. **N° Vert 0 800 308 530**  
APPEL GRATUIT DEPUIS UN POSTE FIXE EN FRANCE  
Fax +33 (0)3 85 30 86 09  
polevu@lamberet.fr - www.lamberet.com